


890LG

890LG is a EMI gasket which is made of aluminum foil hot melt cloth wrapped with high density polyurethane foam core. With electrically conductive PSA coated, It is easily to install and widely used in the NB,PC or other electric or electronics devices.

Features and benefits

- light weight and good seals
- Various profiles available
- EMI shielding and light reflection

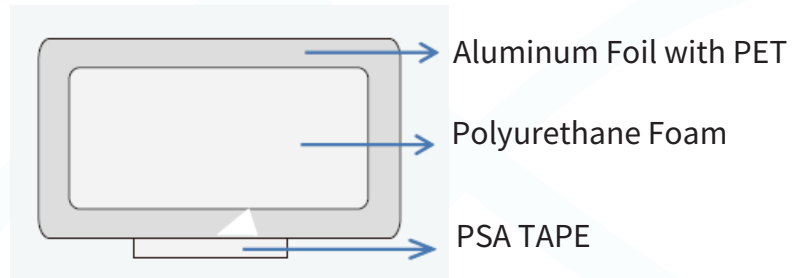

Specifications

PROPERTIES		DATA	TEST METHOD
aluminum foil hot melt cloth	Color	Bright Silver	Visual
	Total Thickness , mm	0.12 ± 0.05	ASTM D374
	Surface Resistivity, ohm/sq	< 0.05	MIL-DTL-83528
	Thickness of hot-melt ^a , mm	0.03	ASTM D374
PU Foam	Foam Density, kg/m ³	90 ± 10	ASTM D3574
Dimension Availability Width*Height, mm		W: 0.8~100/H: 0.3~30	Internal standard
Recommended compression Rate,%		30~50	Internal standard
Shielding Effectiveness, dB		>72	ASTM D4935
Operating Temperature, °C		-20 ~ 80	ASTM D1000

a : the hotmelt film will melt into the Polyurethane foam in the processing.

PRESSURE SENSITIVE ADHESIVE (PSA TAPE) OPTIONS

Name	Type	Thickness (mm)	Peel strength on stainless steel (PSTC-101)	Z-axis Resistance
LY1219-5*	Conductive PSA	0.05	>1.5 kgf/25 mm	< 0.01 Ω
LY1219-7*	Conductive PSA	0.07	>1.7 kgf/25 mm	< 0.01 Ω
LY-T013*	PSA	0.13	> 1.8 kgf/25 mm	-

*Other PSA is available upon request.

Storage and Shelf Life

Storage Temperature: 10~22 °C

Storage Humidity: 40~60% RH

Shelf Life: 6 Months

Regulation

RoHS & HF Compliant

The information contained in this document intended to assist you in designing with the material and is not intended to and does not constitute any express or implied warranty, including any warranty of merchantability, fitness for a particular purpose, or that the user will achieve the results shown in this material for a particular purpose. It is the user's responsibility to determine the suitability of the material for your particular application.

